

RESOLUTION NO. 2023-__196__

A RESOLUTION AUTHORIZING THE PURCHASE OF THREE (3) INTERNATIONAL TRUCKS FROM HUNTER TRUCK, SWEDESBORO, NJ, IN AN AGGREGATE AMOUNT NOT TO EXCEED \$577,346.50, PURSUANT TO A NATIONAL COOPERATIVE CONTRACT AGREEMENT WITH SOURCEWELL, CONTRACT 060920-NVS.

WHEREAS, the City of Vineland is in need of three (3) International Trucks; and

WHEREAS, the City of Vineland is a member of a National Cooperative Purchasing Agreement known as Sourcewell under member number 19409; and, Sourcewell is a national cooperative contract organization; and,

WHEREAS, Sourcewell, National Cooperative Purchasing Program has acted as lead agency and awarded Contract 060920-NVS, for the purchase of International Trucks. Specific information regarding the contract may be found on the Sourcewell website at www.sourcewell-mn.gov; and,

WHEREAS, N.J.S.A. 52:34-6.2 permits the City of Vineland to purchase vehicles using the offered National Cooperative Pricing Agreement without public bidding, subject to the submittal and acceptance of certain documentation by Hunter Truck; and

WHEREAS, the City of Vineland intends under Sourcewell, under the Category: Class 4-8 Chassis with Related Equipment, Contract #060920-NVS, to purchase from Hunter Truck, Swedesboro, NJ the following International Trucks for the designated City of Vineland Departments and Divisions, in the not-to-exceed amounts, as listed in the Quotations, made available through Sourcewell;

Administration/Mason: One (1) 2024 International HV507 6x4 Truck with Plow, not to exceed \$265,885.50

Public Works/Roads: One (1) 2024 International CV515 4x4 Truck with Dump Body, Plow and Spreader, not to exceed \$142,868.00

Administration/Solid Waste and Recycling: One (1) 2024 International CV515 Chassis and A 8 Yard Refuse Rear Loader Body Truck, not to exceed \$168,593.00

WHEREAS, the Department and Division Directors and Supervisors and the Qualified Purchasing Agent, with the concurrence of the Business Administrator, recommend the use of the National Cooperative Pricing through Sourcewell for this procurement; and

WHEREAS, the City of Vineland Purchasing Agent has determined that the use of the offered National Cooperative Contract will result in cost savings after all factors, including charges for service, material and delivery have been considered and has verified that such equipment is not available through State Contract awarded by the Division of Purchase and Property in the New Jersey Department of the Treasury pursuant to N.J.S.A. 40A:11-12; and

WHEREAS, the availability of funds for said purchase to be awarded herein have been certified by the Chief Financial Officer; and

CITY OF VINELAND, NJ

WHEREAS, the City of Vineland has certified that this meets the statute and regulations governing the award of said contracts;

NOW, THEREFORE, BE IT RESOLVED BY THE COUNCIL OF THE CITY OF VINELAND, that the Purchasing Agent is authorized to prepare purchase orders to procure the trucks listed above, for an aggregate price not to exceed \$577,346.50.

BE IT FURTHER RESOLVED that the purchase order shall contain a requirement that “the vendor shall maintain all documentation related to products, transactions or services under this contract for a period of five years from the date of final payment. Such records shall be made available to the New Jersey Office of the State Comptroller upon request”.

Adopted:

President of Council

ATTEST:

City Clerk

**REQUEST FOR RESOLUTION
FOR COOPERATIVE CONTRACT AWARDS
UNDER 40A:11-12, N.J.A.C. 5:34-7.29 & LFN 2012-10
(REQUIRED FOR PURCHASES OVER \$17,500.00)**



4/14/23
(DATE)

1. Goods or Services (detailed description): (1) 2024 INTERNATIONAL HV507 6X4 W PLOW FOR MASON DIVISON
@ \$265,885.50

2. Amount to be Awarded: \$265,885.50

- Encumber Total Award
 Encumber by Supplemental Release

3. Budgeted: By Ordinance No. ORDINANCE 2023-23
Or Grant: Title & Year _____

4. **Account Number to be Charged: C-04-00-000-2323-78005

5. Contract Period (if applicable): _____

6. Date to be Awarded: _____

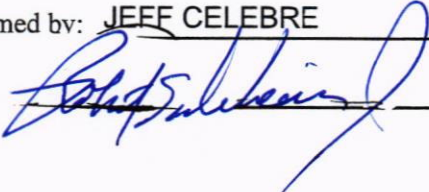
7. Recommended Vendor and Address: HUNTER TRUCK SALES
2320 HIGH HILL RD, Swedesboro, NJ 08085

8. Justification for Vendor Recommendation:(attach add'l information for Council review)

Type of Contract: State National Regional County

Vendor's Cooperative Contract # SOURCEWELL 060920-NVS expires Aug 1, 2024

9. Evaluation Performed by: JEFF CELEBRE

10. Approved by:  _____ Date _____

11. Attachments:
 Awarding Proposal
 Other: _____

- Send Original to: Purchasing Department
- Send copies to: Business Administration

****If more than one account #, provide break down**



International Trucks is pleased to provide you with this proposal compliant with all terms of the Sourcewell Vehicles and Chassis Contract #060920-NVS awarded to Navistar, Inc for new International Trucks. If you have any questions regarding enrollment in Sourcewell or detailed contract terms and conditions, please see your International Truck sales representative.

PROPOSAL PREPARED FOR:		PROPOSAL PREPARED BY:
Sourcewell Member:	CITY OF VINELAND	Hunter Truck Sales
Contact:	JEFF CELEBRE	Mark Ansberry
Address:	640 EAST WOOD STREET	2320 High Hill Road
City/State/Zip:	VINELAND NJ 08362	Swedesboro, NJ 08085
Phone:	856-794-4000	856.241.8890
Email:	icelebre@vinelandcity.org	mansberry@huntertrucksales.com

Proposal Number	16579
Date	04/13/2023
Quantity of this Specification	1
Single Sourcewell Transaction Total Volume	1

Chassis		
New 2024 International HV507 6x4 Chassis		\$ 185,364.00
Base Chassis List	\$ 119,239.00	
Options List	\$ 66,125.00	
Sourcewell Contract Discount	36.4%	\$ (67,472.50)
Volume Incentive		\$ -
Material Price Increases		\$ 2,000.00
Net Sourcewell Chassis Price		\$ 119,891.50
Sourcewell Partner Body		
		\$ -
Handling Fee	4.00%	\$ -
Non-Sourcewell Dealer Supplied Body		
HA DEHART		\$ 127,280.00
Handling Fee	5.00%	\$ 6,364.00
Additional Post Build Work		
		\$ -
Handling Fee	5.00%	\$ -
Service Contracts		
		\$ -
Additional Freight		
		\$ -
Additional Floorplan		
FLOOR PLAN TO INSTALL ALL EQUIPMENT		\$ 2,100.00
		\$ -
Additional Fees & Taxes		
ESTIMATED 2024 MODEL SURCHARGE INCREASE		\$ 9,500.00
DEALER PREP DOT FIRE EXT AND TRIANGLE KIT		\$ 750.00
		\$ -
Final Sourcewell Customer Price FOB CITY OF VINELAND		\$ 265,885.50

Additional Sourcewell Qualified Content	
Customer Parts Credit - Fleet Charge only	\$200
A26 Incremental Parts Credit - Fleet Charge only	\$200
Silver Package Award	\$1,200

Terms:

Stock unit in dealer's inventory, dealer will accept a final purchase order using the current Sourcewell pricing quoted above.

Dealer placing a new orders for the Sourcewell Member, the purchase order cannot be firmied up until the unit is slotted to build with a firm build date or lineset. Once a firm build date has been established, dealer will provide the Sourcewell Member approved pricing and a final purchase order can be accepted with firm pricing. Dealer cannot guarantee bodies and/or equipment pricing added to the chassis for a turnkey sale until chassis is lineset.

Prepared For:
City of Vineland
Jeff Celebre
640 East Wood Street
Vineland, NJ 08362-
(856)794 - 4000
Reference ID: 6X4 DUMP

Presented By:
HUNTER TRUCK
Tom Grogan
2320 HIGH HILL RD.
LOGAN TOWNSHIP NJ 080854538
856-241-8890

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2024 HV507 SFA (HV507)

AXLE CONFIG:	6X4
APPLICATION:	Front Plow with spreader
MISSION:	Requested GVWR: 66000. Calc. GVWR: 64000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 17.33% / 2.14% @ 55 MPH Calc. Geared Speed: 73.4 MPH
DIMENSION:	Wheelbase: 183.00, CA: 108.00, Axle to Frame: 75.00
ENGINE, DIESEL:	{Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
PAINT:	Cab schematic 100WK Location 1: 9219, Winter White (Std) Chassis schematic N/A

Description

Base Chassis, Model HV507 SFA with 183.00 Wheelbase, 108.00 CA, and 75.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

AXLE CONFIGURATION {Navistar} 6x4

Notes

: Pricing may change if axle configuration is changed.

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL

BUMPER, FRONT Swept Back, Steel, Heavy Duty

FRAME DIMPLE Dimple on Left and Right Top Flange of Frame Rail to Reference Rear Axle Centerline

FRAME EXTENSION, FRONT Integral; 20" In Front of Grille

WHEELBASE RANGE 177" (450cm) Through and Including 226" (575cm)

AXLE, FRONT NON-DRIVING {Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 18,000-lb Capacity, with Shock Absorbers

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

Includes

: BRAKE LINES Color and Size Coded Nylon

: DRAIN VALVE Twist-Type

: GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster

: PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel

: PARKING BRAKE VALVE For Truck

: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4

: SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6

TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck

Notes

: When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.

TRAILER HOSES Glad Hands for Four-Wheel Connections, Temporarily Mounted with Bulkhead Connectors on End of Frame, Includes Additional Hosing and Dummy Glad Hands

DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank

AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System

AIR DRYER {Bendix AD-IP} with Heater

BRAKE CHAMBERS, FRONT AXLE {MGM} 24 Sqli

BRAKE CHAMBERS, REAR AXLE {MGM TR3030LP3TSHD} 30/30 Sqli Spring Brake

BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake

SLACK ADJUSTERS, FRONT {Haldex} Automatic

SLACK ADJUSTERS, REAR {Haldex} Automatic

AIR COMPRESSOR {Cummins} 18.7 CFM

AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab

AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail

DUST SHIELDS, FRONT BRAKE for Air Cam Brakes

Description

DUST SHIELDS, REAR BRAKE for Air Cam Brakes

BRAKES, REAR {Meritor 16.5X8.625 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 8.625", 23,000-lb Capacity per Axle

BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity

PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 18" Dia., Black

STEERING GEAR (2) {Sheppard M100/M80} Dual Power

DRIVELINE SYSTEM {Dana Spicer} SPL170 Main Driveline with SPL170 Interaxle Shaft, for 6x4

AFTERTREATMENT COVER Aluminum

EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

ENGINE COMPRESSION BRAKE {Jacobs} for Cummins ISL/L9 Engines; with Selector Switch and On/Off Switch

TAIL PIPE (1) Turnback Type

EXHAUST HEIGHT 8' 10"

MUFFLER/TAIL PIPE GUARD (1) Aluminum

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

Includes

- : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
- : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
- : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
- : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
- : STARTER SWITCH Electric, Key Operated
- : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
- : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
- : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
- : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
- : WIRING, CHASSIS Color Coded and Continuously Numbered

CIGAR LIGHTER Includes Ash Cup

ALTERNATOR {Delco Remy 36SI} Brushless, 12 Volt, 165 Amp Capacity, Pad Mount, with Remote Sense

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket

HORN, AIR (2) Single Tone, Chrome, Roof Mounted, with Lanyard Pull Cord

BATTERY SYSTEM {Fleetrite} Maintenance-Free, (4) 12-Volt 3800CCA Total, Top Threaded Stud

2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab

SPEAKERS (2) 6.5" Dual Cone Mounted in Doors

Description

RADIO, AUXILIARY CONTROLS Mounted in Steering Wheel, Radio Function Control Switch, Includes Volume Up/Down, Mute, Forward/Back and Bluetooth Answer/Disconnect

ANTENNA for Increased Roof Clearance Applications

RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input

AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications

TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch

HORN, ELECTRIC Disc Style

BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab

JUMP START STUD Remote Mounted

BACK-UP ALARM {Preco 1059} Electronic; Solid State, Dual Function, 112 dBA

WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights

HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on

STARTING MOTOR {Delco Remy 39MT} 12 Volt, Gear Reduced, with Thermal Over-Crank Protection

INDICATOR, LOW COOLANT LEVEL with Audible Alarm

ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

USB PORT (2) Located in the Instrument Panel

HEADLIGHTS Halogen, with Daytime Running Lights

LOGOS EXTERIOR Model Badges

LOGOS EXTERIOR, ENGINE Badges

HOOD, HATCH (01) for Servicing

INSULATION, UNDER HOOD for Sound Abatement

GRILLE Stationary, Chrome

INSULATION, SPLASH PANELS for Sound Abatement

BUG SCREEN Mounted Behind Grille

FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV

PAINT SCHEMATIC, PT-1 Single Color, Design 100

Includes

: PAINT SCHEMATIC ID LETTERS "WK"

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360

Description

LABEL, DEF "DEF ONLY"

SAFETY TRIANGLES

KEYS - ALL ALIKE, ID I-1624 Compatible with Z-250

FIRE EXTINGUISHER 5 lb Class A B C

FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat

CLUTCH Omit Item (Clutch & Control)

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines

Includes

: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

ENGINE, DIESEL {Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)

FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

Includes

: FAN Nylon

RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler

Includes

: DEAERATION SYSTEM with Surge Tank

: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps

: RADIATOR HOSES Premium, Rubber

AIR CLEANER Single Element

EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2023

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

HOSE CLAMPS, RADIATOR HOSES {R.G. Ray Mini Flex Seal} Coil Spring/"T"-Bolt Constant Torque Type, for Radiator Hoses over 1" I.D.

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door

CARB EMISSION WARR COMPLIANCE for Cummins L9 Engines

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines

TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

OIL COOLER, TRANSMISSION {Modine} Water to Oil Type

TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming

Description

PTO LOCATION Dual, Customer Intends to Install PTO at Left and/or Right Side of Transmission

AXLE, REAR, TANDEM {Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.38

SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings

TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only

AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints

AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks

FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine

FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 50 US Gal (189L), Mounted Left Side, Under Cab

DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab

CAB Conventional, Day Cab

AIR CONDITIONER with Integral Heater and Defroster

GAUGE CLUSTER Base Level; English with English Electronic Speedometer

Includes

: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for

: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure

: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)

GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission

GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust

SEAT, TWO-MAN PASSENGER {National} Fixed Back, Integrated Headrest in Both Occupant Positions, Vinyl, with Under Seat Storage Compartment

MIRRORS (2) C-Loop, Heated, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width

Notes

: Mirror Dimensions are Rounded to the Nearest 0.5"

MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"

SEAT BELT All Orange; 1 to 3

CAB INTERIOR TRIM Classic, for Day Cab

Includes

: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger

: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted

: SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap

MONITOR, TIRE PRESSURE Omit

Description

WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature

CAB REAR SUSPENSION Air Bag Type

INSTRUMENT PANEL Flat Panel

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc

WHEELS, REAR {Maxion 91541} DUAL DISC; 22.5x8.25 Rims, Painted Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

PAINT IDENTITY, REAR WHEELS Disc Rear Wheels; with Vendor Applied White Powder Coat Paint

WHEEL GUARDS, FRONT {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts Mounted Between Hub and Wheel

WHEEL GUARDS, REAR {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts, Mounted Between Hub & Wheel and Between Dual Wheels

WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil

BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches

(8) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive

(2) TIRE, FRONT 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position

Services Section:

WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

CARB COMPANION PLAN {Navistar} for CARB B6.7 and L9 Engines

PRER CHASSIS



March 30, 2023

Hunter International
Attn: Mark / Tom

End user: City of Vineland - Tandem
Attn: Jeff Celebre
EMAIL: JCELEBRE@VINELANDCITY.ORG

QUOTE

For HV Tandem Axle Chassis
ARM Dump (Tandem) with Plow and Spreader

Dumping Bed System

14' Length x 42" Side Wall Height x 48" Tailgate Height
Floor - 1/4" 450 Brinell - Hardox
Front - 3/16" 304 Stainless Steel
Sides - 3/16" 304 Stainless Steel
Long Sills - 8" I Beam 3/16" Brinell 250
Outside Bod Width - 96"
Hoist Attachment - Front Mount
Hoist: Mailhot CS
Front Design - Hoist Recessed 90 Corners
Front Height - 72"
Long Sills Shape - I Beam
Long Sill OD - 34" Outside width Diameter
Long Sills ID - 27" Inside Width Diameter

Cab Shield:

Cab Shield Type - Traditional - 3/16" 304 Stainless Steel
Cab Shield Length - 24" Projection
Cab Shield Width - 84"
Cab Shield Height - 80"
Light Holes Configuration - 6 Oval Light Holes
Cab Shield Installation - Installed

Sides:

Side Wall Shape - Formed One Piece Side Wall
Top Rail Section - Formed

(1) Side Options:

Wood Board Brackets - SS (1) Each Side
Wood - (1) (Set Oak Boards 2" x 6" x 8' Painted Black
Driver Ladder - (1) Under Body Retractable Ladder
Shovel Holder - (1) SS Shovel Holder Bolt on Driver Side
Shovel Kit - (1) Shovel

(1) Rear Gate:
Double Action
Tailgate Angle: Straight
Locking Positioning – End Point Latch System
Bolster Shape – Standard Flat Rear Bolster
Locking System – Air Latch Tailgate
Tailgate Latch Cylinder – (1) Pneumatic Cylinder 3.125" Bore x 8" Stroke
Tailgate Panel – 2 Panel Bracing (Formed)
Tailgate Chains: (1) Set Chains and Holders Installed
Mudflap Brackets (1) Mudflap Brackets

Fenders:
Poly Fenders: (2) Set Poly Fenders with SS Hardware and Brackets

(1) Hydraulic Dumping Hardware:
20 Ton Cradle. Hoist Bracket / Cylinder Blocks
20 Ton Rear Hinge – Heavy Duty Greaseable Pins
Body Prop – Mounted on Cradle
Rubber Long Sill Bumpers – (1) Set
Long Sill Reinforcements – (1) Set

Trunnion Hoist:
Mailhot CS90-4.5-3 DA (Double Acting)

(1) Lighting:
Marker Light Holes on Rear Posts
Light Holes in Rear Post – (2) Ovals
Cab Shield – (2) Front Facing – (2) Side Facing Ovals – (2) Rear Facing Ovals
Rear Post Light Kit – Premium Double Light Kit – Class 1 LED S/T/T & (1) Amber LED Strobe
Cab Shield Light Kit – (3 Sets) Amber Class 1 LED Strobes
Spreader Lights: (1) Set Heated LED Work Lights Mounted Rear Post for Spinner Disk

(1) Prep and Paint:
Complete System Blasted, Prepped, Prime and Paint
Underbody – Painted PPG Black Underbody
Bed – Natural 304 Stainless

(1) Standard ARM Central Hydraulic System: Air Controls & Electric Spreader Controls:
ARM Console Mounted in Cab on Swivel Stand with Integrated Functions
Ditco Motiv Electric Ground Speed Spreader Control
High Volume Constant Flow Plump with Flow Divider for Optional Performance
Parker Hot Shift PTO & Gear Pump with Switch Mounted in Cab
Stainless Steel 35 Gallon Valve enclosure reservoir with in tank filter and sight gauge including
Air controlled valve sections for Double Acting; Plow Up/ Down – Left/ Right- Dump Body Up/Down
Stainless Steel Hydraulic lines mounted ridged to frame for spreader auger / spinner & dump body up /down
Fluids / Fittings/ Hoses/ Stainless Tube

(1) Pintle Plate:
1" 20 Ton Pintle Plate
Multiple Pintle Hook Mounting Positions
(2) 1" D Rings
(1) 7 Pin Trailer electrical Adapter
(1) Rear ICC Light Mounted on Hinge
(1) 20 Ton Pintle Hook

(1) Snow Plow Hitch:

Quick Hitch – QCP Style Heavy Duty Snow Plow Hitch

Lift Arm – Telescopic Lift are with Multi-Positions and Lock Down

Lift Cylinder – 4"x10" Lift Cylinder

Side Plates: Integral to Front Frame to Chassis

Snow Plow Lights: (1) Set LED Heated Snow Plow Heat Lights with SS Brackets

(1) Swing Gate: (1) Heavy Duty Swing Gate

(1) Buyers Salt Dogg Spreader: 92420SSA

UTG SS Standard Direct Drive Salt Spreader

(1) Aero Electric Flip Tarp

(1) Aero Electric Flip Tarp with Heavy Duty Tarp and In Cab Control

(1) Dump Body Vibrator

(1) Electric Dump Body Vibrator

Optimo Safety Back Up Camera System:

(1) Sony IP69 Back up Camera with 7" in Cab Monitor – Color, Audio / Night Vision

(1) Passenger Lane Camera

(1) Driver Lane Camera

(1) Inside Box Camera

(1) Viking Power Angle Snow Plow 10'x36"

**REQUEST FOR RESOLUTION
FOR COOPERATIVE CONTRACT AWARDS
UNDER 40A:11-12, N.J.A.C. 5:34-7.29 & LFN 2012-10
(REQUIRED FOR PURCHASES OVER \$17,500.00)**



4/18/23
(DATE)

1. Goods or Services (detailed description): (1) 2024 INTERNATIONAL CV515 4X4 W DUMP BODY, PLOW, AND SPREADER FOR PWSR @ \$142,868.00 EACH

2. Amount to be Awarded: \$142,868.00

- Encumber Total Award
 Encumber by Supplemental Release

3. Budgeted: By Ordinance No. ORDINANCE 2023-23
Or Grant: Title & Year _____

4. **Account Number to be Charged: C-04-00-000-2323-78005

5. Contract Period (if applicable): _____

6. Date to be Awarded: 5/10/23

7. Recommended Vendor and Address: HUNTER TRUCK SALES
2320 HIGH HILL RD, Swedesboro, NJ 08085

8. Justification for Vendor Recommendation:(attach add'l information for Council review)

Type of Contract: State National Regional County

Vendor's Cooperative Contract # SOURCEWELL 060920-NVS expires Aug. 1, 2024

9. Evaluation Performed by: JEFF CELEBRE

10. Approved by: *[Signature]* 4-18-2023
Date

11. Attachments:
 Awarding Proposal
 Other: _____

- Send Original to: Purchasing Department
- Send copies to: Business Administration

****If more than one account #, provide break down**



International Trucks is pleased to provide you with this proposal compliant with all terms of the Sourcewell Vehicles and Chassis Contract #060920-NVS awarded to Navistar, Inc for new International Truck. If you have any questions regarding enrollment in Sourcewell or detailed contract terms and conditions, please see your International Truck sales representative.

PROPOSAL PREPARED FOR:		PROPOSAL PREPARED BY:	
Sourcewell Member:	CITY OF VINELAND	HUNTER TRUCK SALES AND SERVICE	
Contact:	JEFF CELEBRE	TOM GROGAN	
Address:	640 EAST WOOD STREET	2320 HIGH HILL ROAD	
City/State/Zip:	VINELAND NJ 08362	SWEDESBORO NJ 08085	
Phone:	856-794-4000	267-253-3870	
Email:	jcelebre@vinelandcity.org	tgrogan@huntertrucksales.com	

Proposal Number	16586
Date	APRIL 17 2023
Quantity of this Specification	1
Single Sourcewell Transaction Total Volume	2

Chassis			
New 2024 International CV515 Chassis			\$ 67,098.00
Base Chassis List	\$ 51,683.00		
Options List	\$ 15,415.00		
Sourcewell Contract Discount	\$ 6,000.00		\$ (6,000.00)
Volume Incentive			\$ -
Freight			\$ 1,950.00
Raw Material Increase			\$ 3,500.00
Chassis Handling Fee (Limited to \$1000)			\$ 1,000.00
Net Sourcewell Chassis Price			\$ 67,548.00
Sourcewell Partner Body			\$ -
			\$ -
	4.00%		\$ -
Non-Sourcewell Dealer Supplied Body			\$ 63,900.00
HA DEHART			\$ -
Handling Fee	5.00%		\$ 3,195.00
Additional Post Build Work			\$ -
			\$ -
			\$ -
Handling Fee	5.00%		\$ -
Service Contracts			\$ -
			\$ -
			\$ -
Additional Freight			\$ -
			\$ -
Additional Floorplan			\$ 1,700.00
FLOOR PLAN TO INSTALL EQUIPMENT			\$ -
Additional Fees & Taxes			\$ 5,875.00
2024 STEEL, MATERIAL AND EMISSION SURCHARGES			\$ 650.00
DEALER PREP DOT FIREEXT AND TRIANGLE KIT			\$ -
Total Sourcewell Customer Price FOB CITY OF VINELAND			\$ 142,868.00

Additional Sourcewell Qualified Content	
Customer Parts Credit - Fleet Charge only	\$200
Silver Package Award	\$1,200

Terms: Stock unit in dealer's inventory, dealer will accept a final purchase order using the current Sourcewell pricing quoted above.

Dealer placing a new orders for the Sourcewell Member, the purchase order cannot be firm up until the unit is slotted to build with a firm build date or lineset. Once a firm build date has been established, dealer will provide the Sourcewell Member approved pricing and a final purchase order can be accepted with firm pricing. Dealer cannot guarantee bodies and/or equipment pricing added to the chassis for a turnkey sale until chassis is lineset.

April 17, 2023

INTERNATIONAL®

Prepared For:
City of Vineland
Jeff Celebre
640 East Wood Street
Vineland, NJ 08362-
(856)794 - 4000
Reference ID: N/A

Presented By:
HUNTER TRUCK
Tom Grogan
2320 HIGH HILL RD.
LOGAN TOWNSHIP NJ 080854538
856-241-8890

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2023 CV515 SFA (CV515)

AXLE CONFIG:	4X4
APPLICATION:	Landscape Dump
MISSION:	Requested GVWR: 21000. Calc. GVWR: 23000. Calc. GCWR: 37000 Calc. Start / Grade Ability: 39.01% / 2.57% @ 55 MPH Calc. Geared Speed: 103.2 MPH
DIMENSION:	Wheelbase: 165.00, CA: 83.80, Axle to Frame: 63.00
ENGINE, DIESEL:	{International 6.6} EPA 2021, 350HP @ 2700 RPM, 700 lb-ft Torque @ 1600 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 2750 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 37,500-lb GCW Max, On/Off Highway
AXLE, FRONT DRIVING:	{Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting
AXLE, REAR, SINGLE:	{Dana Spicer S140} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive
TIRE, REAR:	(4) 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive
SUSPENSION, REAR, SINGLE:	15,500-lb Capacity, Vari-Rate Springs
PAINT:	Cab schematic 100CX Location 1: 9219, Winter White (Std) Chassis schematic N/A

Description

Base Chassis, Model CV515 SFA with 165.00 Wheelbase, 83.80 CA, and 63.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

AXLE CONFIGURATION {Navistar} 4x4

Notes

: Pricing may change if axle configuration is changed.

FRAME RAILS High Strength Low Alloy Steel (50,000 PSI Yield), Straight Top Flange with Contoured Bottom, Height Transitions from 7.375" (187.325mm) to 9.125" (231.775mm) to 7.625" (193.675mm); Width: 3.079" (78.21mm); Thickness: 0.3125" (7.94mm); 383.3" (9735.8mm) Max OAL

LICENSE PLATE HOLDER Includes Upper & Lower Mounting Plate Hardware, Mounted in Existing Holes in Front Bumper

BUMPER, FRONT Contoured, Steel, Chrome Plated, for CV and RE Bus

WHEELBASE RANGE 128" (325cm) Through and Including 183" (465cm)

AF RANGE 50" (128cm) Through and Including 75" (190cm)

AXLE, FRONT DRIVING {Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting

AXLE, FRONT DRIVING, LUBE {EmGard FE-75W-90} Synthetic Oil; 1 thru 29.99 Pints

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 7,500-lb Capacity, with Shock Absorbers

BRAKE SYSTEM, HYDRAULIC {Bosch} Split System, with Four Channel ABS, Traction Control, Electronic Stability Control, Hydromax Brake Booster with High Speed Master Cylinder and Trailer Sway Control

DUST SHIELDS, FRONT BRAKE for Hydraulic Brakes

DUST SHIELDS, REAR BRAKE for Hydraulic Brakes

BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Foot Operated in Cab; Differential Mounted

BRAKES, FRONT {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 8,000-lb Capacity

BRAKES, REAR {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 15,500-lb Capacity per Axle

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 15" Dia., Black

STEERING GEAR {Bosch S2 8014 Plus} Power

PROPSHAFT GUARD

DRIVELINE SYSTEM {Dana Spicer} SPL100 Main Driveline. Direct Mount Transfer Case to Transmission, SPL70 Driveline to Front Axle, for 4x4

EXHAUST SYSTEM Horizontal, Frame Mounted Right Side, Under Rail, for Single Exhaust

ENGINE EXHAUST BRAKE for International 6.6 Engine

MANUAL REGEN Capability

ELECTRICAL SYSTEM 12-Volt for CV Model

Includes

: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: PARKING LIGHT PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: TURN SIGNALS, FRONT Includes Reflectors and Solid State Flashers; Flush Mounted

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature, Integral with Turn Signal Lever

HORN, ELECTRIC (2) Disc Style

Description

DEFROSTER, REAR WINDOW Electric
ALTERNATOR (Denso SC6) Brush Type, 12 Volt, 220 Amp Capacity
TRAILER BRAKE CONTROL Integrated
BODY BUILDER WIRING Rear of Frame; Includes One Sealed Connector for Separate Ground/Backup/ Left and Right Hand Turn, Left and Right Hand Tail/Stop/ Accessory Power and Combined for Left and Right Hand Stop/Turn
BATTERY SYSTEM (VARTA) Maintenance-Free, (2) 12-Volt 1300CCA Total, Top Threaded Stud
RADIO AM/FM/Clock/Bluetooth, Seek/Scan, with 7" Color Touch Panel Display
SPEAKERS (6)
BACK-UP ALARM Electric, 102 dBA
TRAILER CONNECTION SOCKET Mounted at Rear of Frame, Wired for Turn Signals Combined with Stop, Compatible with Trailers with Combined Stop, Tail, Turn Lamps
STOP, TURN, TAIL & B/U LIGHTS Multi-Function, Sealed, LED Lights for Stop, Turn and Tail Lights, Incandescent Backup Lights, with Rear Reflex Reflector, Includes LED License Plate Light
AUXILIARY HARNESS "Y" Harness for Auxiliary Front Head Lights (High/Low Beam), Marker Lights, and Turn Signals for Front Plow Applications
SPECIAL WIRING HARNESS, BODY to Connect to Instrument Panel Electrical Center (ICEM) Connector X7, Provides Blunt Cuts for Standard Terminals 8, 11, 7, 17, 10, 19 Signals, Optional Terminals 1, 4, 14, 20 Signals
BATTERY BOX Steel, with Plastic Cover, 2 Battery Capacity, Parallel to Rail, 28" Wide, Mounted Left Side Under Cab
JUMP START STUD Remote Mounted
SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished End of Frame Light
HEADLIGHTS Halogen, Composite Aero Design, Chrome Trim Bezel, with Daytime Running Lights
SWITCH, AUXILIARY 1 to 4 Latching Switches with 30-Amp Fuses
CLEARANCE/MARKER LIGHTS (5) Amber LED Lights, Flush Mounted on Cab
STARTING MOTOR 12 Volt
SWITCH, TOGGLE, ROOF WORKLIGHT Lighted; in Overhead Console and Wiring Effects for Customer Furnished Roof Mounted Light
LOGOS EXTERIOR Model Badges
GRILLE Chrome, with Chrome Headlight Bezels
RADIATOR STONE GUARD Mounted to Front Bumper
BUG SCREEN Mounted Behind Grille
FRONT END Tilting, Fiberglass, with Three Piece Construction
FENDER EXTENSIONS Painted
PAINT SCHEMATIC, PT-1 Single Color, Design 100
PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
CUSTOMER IDENTITY for Sourcewell
PROMOTIONAL PACKAGE Government Silver Package
KEYS - ALL ALIKE, ADDITIONAL 2 Keys
GCWR RANGE GCWR Equal to or Less than 35,000-lb

Description

MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension

SNOW PLOW PREP PACKAGE Includes Wiring for Roof Mounted Light

GVWR WEIGHT CLASSIFICATION Class 6 (19,501-26,000 lbs)

ENGINE, DIESEL {International 6.6} EPA 2021, 350HP @ 2700 RPM, 700 lb-ft Torque @ 1600 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)

Includes

: GLOW PLUG Automatic with Indicator Light

: OIL FILTER, ENGINE Spin-On Type

FAN DRIVE Viscous Type, Screw On, Rear Tether, Electronically Controlled

AIR CLEANER Single Element, with Water Separator

EMISSION, CALENDAR YEAR {International 6.6} EPA, OBD and GHG Certified for Calendar Year 2023

THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic Controlled, On/Off Switch Mounted on Dash, with Steering Wheel Button Control

GOVERNOR Electronic Road Speed Type; with 70 MPH Default

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door

BLOCK HEATER, ENGINE 120V/800W

CARB EMISSION WARR COMPLIANCE for International 6.6 Engines

RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 730 SqIn Louvered, with 578 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler

TRANSMISSION, AUTOMATIC {Allison 2750 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 37,500-lb GCW Max, On/Off Highway

TRANSFER CASE {Meritor MTC-3203} 2-Speed, Gear Drive, 3,000 lb-ft Torque Rating, Less PTO Provision, Electric Shift Control

Notes

: Transfer Case Includes 40W Synthetic Lube

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming

PTO LOCATION Customer Intends to Install PTO at Right Side of Transmission

DIFFERENTIAL, LOCKING {Detroit Locker} No-Spin; for Dana Spicer (previously Eaton) Rear Axles

AXLE, REAR, SINGLE (Dana Spicer S140) Single Reduction, 15,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 4.30

SUSPENSION, REAR, SINGLE 15,500-lb Capacity, Vari-Rate Springs

SHOCK ABSORBERS, REAR (2)

AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 1 thru 29.99 Pints

FUEL TANK Top Draw, Plastic, Rectangular, 17" Tank Depth, 40 US Gal (151L), Includes Auxiliary Draw Port and Fuel Filler Assembly, Mounted Between Frame Rails and Behind Rear Axle

DEF TANK 6.75 US Gal (26L) Capacity, Frame Mounted Outside Right Rail, Under Cab

CAB Conventional, Day Cab

Includes

: CAB DOOR LOCKS Power Door Locks All Doors

Description

: DOME LIGHT, CAB with OFF/DOOR/ON Settings; Located in Overhead Console
: READING LIGHT, CAB Located in Overhead Console
: STEP (2) One Per Door
: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door

MIRROR, INSIDE REAR VIEW Omit

GLASS, ALL WINDOWS Solar Absorbing, Tint

COLOR, INTERIOR Dark Ash

GAUGE CLUSTER English Speedometer, Includes English Odometer; Includes 3.5" Monochromatic Display with Personalization, Warning Messages and Vehicle Information

SEAT, DRIVER High Back with Integral Headrest, 10-Way Power Adjustable, Vinyl, Power Lumbar

SEAT, PASSENGER High Back with Integral Headrest, Vinyl, with Recline, without Center Section. Center Area of Floor Between Seats will be Untrimmed

MIRRORS (2) Manual Folding, Power Adjust, Heated, Black Heads and Arms, for 102" Load Width

SEAT BELT All Orange; 1 to 3

CAB INTERIOR TRIM Classic, for Day Cab

Includes

: SUN VISOR (2) Vinyl

WINDOW, POWER (2) in Left and Right Doors

HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type

AIR BAG, FRONT, DRIVER SIDE

AIR BAG, FRONT, PASSENGER SIDE

AIR BAG, SIDE, DRIVER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE, PASSENGER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE CURTAIN Roof Mounted, for Front and Rear Outboard Seating Positions for Driver and Passenger Sides

AIR CONDITIONER with Heater, Single Zone

WHEELS, FRONT {Accuride 50180} DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

WHEELS, REAR {Accuride 50180} DUAL DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(2) TIRE, FRONT 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive

(4) TIRE, REAR 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive

Services Section:

WARRANTY Standard for CV515, Effective with Vehicles Built December 3, 2018 or Later, CTS-3000A



March 17, 2023
Hunter Truck Sales & Service
Address: 2320 High Hill Road
Swedesboro, NJ 08085
End User: City of Vineland

Quote

FURNISH AND INSTALL

CHASSIS: 2023 INTERNATIONAL CV, TIRES: DW, TANK: S, CA: 84"

(1) GALION 133U 11'5"X84" X18" X24" STAINLESS DUMP BODY (STOCK)-
STAINLESS STEEL

3 PANEL D/A TAILGATE WITH STAINLESS QUICK RELEASE TOP HWD
1/2X84" LONG BACK CAB GUARD

(4) OVAL LIGHT HOLES IN CAB GUARD (2-FRT LIP & 1 EACH SIDE)

2 STEP STAINLESS SLIDE OUT LADDER

FED 108 LED LIGHT KIT WITH REFLECTORS & WIRING HARNESS

(1) OVAL LED S/T/T LIGHT IN EACH REAR CORNER POST

(1) EXTRA OVAL LIGHT HOLE IN EACH REAR CORNER POST

CS620T SCISSOR HOIST IN SUBFRAME

BACK UP ALARM & BODY UP LIGHT

BODY MODEL: 133U-11'5"

CAPACITY: WL 4.5 SB 5.9

LENGTH: 138"

WIDTH: 84"

SIDE HEIGHT: 18"

REAR HEIGHT: 24"

FRONT HEIGHT: 24"

GAUGE:

FLOOR: 3/16" AR450

SIDES: 10 GA 304 #4

FRONT: 10 GA 304 #4

GATE: 10 GA 304 #4

GATE OPTIONS:

PANELS: 6

11 Crown Point Road * Thorofare, NJ 08086-9999
Phone: 856-845-2800 * 800-222-0271
Fax: 856-845-2461

UNDERSTRUCTURE:
LONGSILLS 3/16"X7"
TYPE: STEEL FORMED
CROSSMEMBERS: NONE
BODY PROP: 1

MISCELLANEOUS:
PAINT UNDERSIDE BLACK
HARDWARE: STAINLESS
6" FRONT CORNER POST
11" FULL DEPTH REAR POST
9" FULL DEPTH REAR BOLSTER
DIRT SHEDDING BOX TOP RAIL

CAB PROTECTOR:
SIZE: 1/2 X 84" LONG
GAUGE: 10 GA 304 #4

HA DEHART TO:
TRAILER HITCH:
(1) CLASS V TRAILER HITCH PLATE – ADJUSTABLE – TUBE STYLE WITH PINTLE
BALL COMBO
(1) 7 PRONG RV FLAT PRONG PLUG
(1) MANUAL TARP AND ROLLER

LIGHTS:
(6) OVAL AMBER LED STROBES – 2 FRONT 2 REAR – 1 EACH SIDE CAB SHIELD
(1) ALL LED LIGHTS
(1) LED SPREADER LIGHT

HYDRAULICS:
(1) DEWEEZE FAN BELT KIT #700592-12 OR PTO ON TRANSMISSION CENTRAL
HYDRAULIC SYSTEM
(1) 725227 MANUAL VALVE / TANK COMBO TO OPERATE BODY UP-DOWN AND
SPREADER
DUAL FLOW VALVE ON PEDESTAL IN CAB
MANUAL LEVER CONTROL
FILTER, GATE VALVE, SIGHT GLASS
QUICK COUPLERS AT REAR WITH CAPS
LABEL ALL COUPLERS AND CONTROLS

SNOW PLOW:
09454 MEYER ROAD PRO RP-90-32 9'
17199 KIT
41630 S.O.S. E-73
23067 LED LIGHTS
RUBBER CUTTING EDGE
SNOW DEFLECTOR

11 Crown Point Road * Thorofare, NJ 08086-9999
Phone: 856-845-2800 * 800-222-0271
Fax: 856-845-2461

(1) 64230 MEYER STAINLESS STEEL UNDERTAILGATE SPREADER

PAINT:

(1) STAINLESS BODY – NO PAINT – TOUCH UP ONLY
(1) 3M REFLECTIVE TAPE AROUND PERIMETER

COST \$ 63,900.00

DELIVERY:

HUNTER TO PICK UP AT HA DEHART

X Robert

Bob Hall
Vice President

BH/rh

**REQUEST FOR RESOLUTION
FOR COOPERATIVE CONTRACT AWARDS
UNDER 40A:11-12, N.J.A.C. 5:34-7.29 & LFN 2012-10
(REQUIRED FOR PURCHASES OVER \$17,500.00)**



4/21/23
(DATE)

1. Goods or Services (detailed description): (1) 2024 INTERNATIONAL CV515 CHASSIS AND A 8 YARD
REFUSE REAR LOADER BODY UP TO BE DONE BY HA DEHART

2. Amount to be Awarded: \$168,593.00

- Encumber Total Award
 Encumber by Supplemental Release

3. Budgeted: By Ordinance No. _____
Or Grant: Title & Year RECYCLING GRANT 2019 & RECYCLING GRANT 2020

4. **Account Number to be Charged: G-02-57-506-2019-30417(\$67,548.00) G-02-57-506-2020-30417(\$101,045.00)

5. Contract Period (if applicable): _____

6. Date to be Awarded: _____

7. Recommended Vendor and Address: HUNTER TRUCK SALES AND SERVICE
2320 HIGH HILL RD, SWEDESBORO, NJ, 08085

8. Justification for Vendor Recommendation:(attach add'l information for Council review)

Type of Contract: State National Regional County

Vendor's Cooperative Contract # SOURCEWELL 060920-NVS expires 8/1/24

9. Evaluation Performed by: JEFF CELEBRE

10. Approved by: *Shaun Flan* 4/21/23
Date

11. Attachments:

- Awarding Proposal
 Other: _____

- Send Original to: Purchasing Department
- Send copies to: Business Administration

**If more than one account #, provide break down



International Trucks is pleased to provide you with this proposal compliant with all terms of the Sourcewell Vehicles and Chassis Contract #060920-NVS awarded to Navistar, Inc for new International Truck. If you have any questions regarding enrollment in Sourcewell or detailed contract terms and conditions, please see your International Truck sales representative.

PROPOSAL PREPARED FOR:		PROPOSAL PREPARED BY:
Sourcewell Member:	CITY OF VINELAND	HUNTER TRUCK SALES AND SERVICE
Contact:	JEFF CELEBRE	TOM GROGAN
Address:	640 EAST WOOD STREET	2320 HIGH HILL ROAD
City/State/Zip:	VINELAND NJ 08362	SWEDSBORO NJ 08085
Phone:	856-794-4000	267-253-3870
Email:	celebre@vinelandcity.org	tgrogan@huntertrucksales.com

Proposal Number	16586
Date	APRIL 17 2023
Quantity of this Specification	1
Single Sourcewell Transaction Total Volume	2

Chassis		
New 2024 International CV515 Chassis		\$ 67,098.00
Base Chassis List	\$ 51,683.00	
Options List	\$ 15,415.00	
Sourcewell Contract Discount	\$ 6,000.00	\$ (6,000.00)
Volume Incentive		\$ -
Freight		\$ 1,950.00
Raw Material Increase		\$ 3,500.00
Chassis Handling Fee (Limited to \$1000)		\$ 1,000.00
Net Sourcewell Chassis Price		\$ 67,548.00
Sourcewell Partner Body		
		\$ -
		\$ -
	4.00%	\$ -
Non-Sourcewell Dealer Supplied Body		
HA DEHART		\$ 88,400.00
		\$ -
Handling Fee	5.00%	\$ 4,420.00
Additional Post Build Work		
		\$ -
		\$ -
		\$ -
Handling Fee	5.00%	\$ -
Service Contracts		
		\$ -
		\$ -
		\$ -
Additional Freight		
		\$ -
		\$ -
Additional Floorplan		
FLOOR PLAN TO INSTALL EQUIPMENT		\$ 1,700.00
		\$ -
Additional Fees & Taxes		
2024 STEEL, MATERIAL AND EMISSION SURCHARGES		\$ 5,875.00
DEALER PREP DOT FIREEXT AND TRIANGLE KIT		\$ 650.00
		\$ -
Total Sourcewell Customer Price FOB CITY OF VINELAND		\$ 168,593.00

Additional Sourcewell Qualified Content	
Customer Parts Credit - Fleet Charge only	\$200
Silver Package Award	\$1,200

Terms: Stock unit in dealer's inventory, dealer will accept a final purchase order using the current Sourcewell pricing quoted above.

Dealer placing a new orders for the Sourcewell Member, the purchase order cannot be firmied up until the unit is slotted to build with a firm build date or lineset. Once a firm build date has been established, dealer will provide the Sourcewell Member approved pricing and a final purchase order can be accepted with firm pricing. Dealer cannot guarantee bodies and/or equipment pricing added to the chassis for a turnkey sale until chassis is lineset.

Prepared For:
City of Vineland
Jeff Celebre
640 East Wood Street
Vineland, NJ 08362-
(856)794 - 4000
Reference ID: N/A

Presented By:
HUNTER TRUCK
Tom Grogan
2320 HIGH HILL RD.
LOGAN TOWNSHIP NJ 080854538
856-241-8890

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

Model Profile
2023 CV515 SFA (CV515)

AXLE CONFIG:	4X4
APPLICATION:	Landscape Dump
MISSION:	Requested GVWR: 21000. Calc. GVWR: 23000. Calc. GCWR: 37000 Calc. Start / Grade Ability: 39.01% / 2.57% @ 55 MPH Calc. Geared Speed: 103.2 MPH
DIMENSION:	Wheelbase: 165.00, CA: 83.80, Axle to Frame: 63.00
ENGINE, DIESEL:	{International 6.6} EPA 2021, 350HP @ 2700 RPM, 700 lb-ft Torque @ 1600 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 2750 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 37,500-lb GCW Max, On/Off Highway
AXLE, FRONT DRIVING:	{Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting
AXLE, REAR, SINGLE:	{Dana Spicer S140} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive
TIRE, REAR:	(4) 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive
SUSPENSION, REAR, SINGLE:	15,500-lb Capacity, Vari-Rate Springs
PAINT:	Cab schematic 100CX Location 1: 9219, Winter White (Std) Chassis schematic N/A

Description

Base Chassis, Model CV515 SFA with 165.00 Wheelbase, 83.80 CA, and 63.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

AXLE CONFIGURATION {Navistar} 4x4

Notes

: Pricing may change if axle configuration is changed.

FRAME RAILS High Strength Low Alloy Steel (50,000 PSI Yield), Straight Top Flange with Contoured Bottom, Height Transitions from 7.375" (187.325mm) to 9.125" (231.775mm) to 7.625" (193.675mm); Width: 3.079" (78.21mm); Thickness: 0.3125" (7.94mm); 383.3" (9735.8mm) Max OAL

LICENSE PLATE HOLDER Includes Upper & Lower Mounting Plate Hardware, Mounted in Existing Holes in Front Bumper

BUMPER, FRONT Contoured, Steel, Chrome Plated, for CV and RE Bus

WHEELBASE RANGE 128" (325cm) Through and Including 183" (465cm)

AF RANGE 50" (128cm) Through and Including 75" (190cm)

AXLE, FRONT DRIVING {Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting

AXLE, FRONT DRIVING, LUBE {EmGard FE-75W-90} Synthetic Oil; 1 thru 29.99 Pints

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 7,500-lb Capacity, with Shock Absorbers

BRAKE SYSTEM, HYDRAULIC {Bosch} Split System, with Four Channel ABS, Traction Control, Electronic Stability Control, Hydromax Brake Booster with High Speed Master Cylinder and Trailer Sway Control

DUST SHIELDS, FRONT BRAKE for Hydraulic Brakes

DUST SHIELDS, REAR BRAKE for Hydraulic Brakes

BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Foot Operated in Cab; Differential Mounted

BRAKES, FRONT {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 8,000-lb Capacity

BRAKES, REAR {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 15,500-lb Capacity per Axle

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 15" Dia., Black

STEERING GEAR {Bosch S2 8014 Plus} Power

PROPSHAFT GUARD

DRIVELINE SYSTEM {Dana Spicer} SPL100 Main Driveline, Direct Mount Transfer Case to Transmission, SPL70 Driveline to Front Axle, for 4x4

EXHAUST SYSTEM Horizontal, Frame Mounted Right Side, Under Rail, for Single Exhaust

ENGINE EXHAUST BRAKE for International 6.6 Engine

MANUAL REGEN Capability

ELECTRICAL SYSTEM 12-Volt for CV Model

Includes

- : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover
- : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
- : PARKING LIGHT PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
- : TURN SIGNALS, FRONT Includes Reflectors and Solid State Flashers; Flush Mounted
- : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature, Integral with Turn Signal Lever

HORN, ELECTRIC (2) Disc Style

Description

DEFROSTER, REAR WINDOW Electric

ALTERNATOR (Denso SC6) Brush Type, 12 Volt, 220 Amp Capacity

TRAILER BRAKE CONTROL Integrated

BODY BUILDER WIRING Rear of Frame; Includes One Sealed Connector for Separate Ground/Backup/ Left and Right Hand Turn, Left and Right Hand Tail/Stop/ Accessory Power and Combined for Left and Right Hand Stop/Turn

BATTERY SYSTEM {VARTA} Maintenance-Free, (2) 12-Volt 1300CCA Total, Top Threaded Stud

RADIO AM/FM/Clock/Bluetooth, Seek/Scan, with 7" Color Touch Panel Display

SPEAKERS (6)

BACK-UP ALARM Electric, 102 dBA

TRAILER CONNECTION SOCKET Mounted at Rear of Frame, Wired for Turn Signals Combined with Stop, Compatible with Trailers with Combined Stop, Tail, Turn Lamps

STOP, TURN, TAIL & B/U LIGHTS Multi-Function, Sealed, LED Lights for Stop, Turn and Tail Lights, Incandescent Backup Lights, with Rear Reflex Reflector, Includes LED License Plate Light

AUXILIARY HARNESS "Y" Harness for Auxiliary Front Head Lights (High/Low Beam), Marker Lights, and Turn Signals for Front Plow Applications

SPECIAL WIRING HARNESS, BODY to Connect to Instrument Panel Electrical Center (ICEM) Connector X7, Provides Blunt Cuts for Standard Terminals 8, 11, 7, 17, 10, 19 Signals, Optional Terminals 1, 4, 14, 20 Signals

BATTERY BOX Steel, with Plastic Cover, 2 Battery Capacity, Parallel to Rail, 28" Wide, Mounted Left Side Under Cab

JUMP START STUD Remote Mounted

SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished End of Frame Light

HEADLIGHTS Halogen, Composite Aero Design, Chrome Trim Bezel, with Daytime Running Lights

SWITCH, AUXILIARY 1 to 4 Latching Switches with 30-Amp Fuses

CLEARANCE/MARKER LIGHTS (5) Amber LED Lights, Flush Mounted on Cab

STARTING MOTOR 12 Volt

SWITCH, TOGGLE, ROOF WORKLIGHT Lighted; in Overhead Console and Wiring Effects for Customer Furnished Roof Mounted Light

LOGOS EXTERIOR Model Badges

GRILLE Chrome, with Chrome Headlight Bezels

RADIATOR STONE GUARD Mounted to Front Bumper

BUG SCREEN Mounted Behind Grille

FRONT END Tilting, Fiberglass, with Three Piece Construction

FENDER EXTENSIONS Painted

PAINT SCHEMATIC, PT-1 Single Color, Design 100

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

CUSTOMER IDENTITY for Sourcewell

PROMOTIONAL PACKAGE Government Silver Package

KEYS - ALL ALIKE, ADDITIONAL 2 Keys

GCWR RANGE GCWR Equal to or Less than 35,000-lb

Description

MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension

SNOW PLOW PREP PACKAGE Includes Wiring for Roof Mounted Light

GVWR WEIGHT CLASSIFICATION Class 6 (19,501-26,000 lbs)

ENGINE, DIESEL {International 6.6} EPA 2021, 350HP @ 2700 RPM, 700 lb-ft Torque @ 1600 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)

Includes

: GLOW PLUG Automatic with Indicator Light

: OIL FILTER, ENGINE Spin-On Type

FAN DRIVE Viscous Type, Screw On, Rear Tether, Electronically Controlled

AIR CLEANER Single Element, with Water Separator

EMISSION, CALENDAR YEAR {International 6.6} EPA, OBD and GHG Certified for Calendar Year 2023

THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic Controlled, On/Off Switch Mounted on Dash, with Steering Wheel Button Control

GOVERNOR Electronic Road Speed Type; with 70 MPH Default

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door

BLOCK HEATER, ENGINE 120V/800W

CARB EMISSION WARR COMPLIANCE for International 6.6 Engines

RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 730 SqIn Louvered, with 578 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler

TRANSMISSION, AUTOMATIC {Allison 2750 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 37,500-lb GCW Max, On/Off Highway

TRANSFER CASE {Meritor MTC-3203} 2-Speed, Gear Drive, 3,000 lb-ft Torque Rating, Less PTO Provision, Electric Shift Control

Notes

: Transfer Case Includes 40W Synthetic Lube

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming

PTO LOCATION Customer Intends to Install PTO at Right Side of Transmission

DIFFERENTIAL, LOCKING {Detroit Locker} No-Spin; for Dana Spicer (previously Eaton) Rear Axles

AXLE, REAR, SINGLE {Dana Spicer S140} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 4.30

SUSPENSION, REAR, SINGLE 15,500-lb Capacity, Vari-Rate Springs

SHOCK ABSORBERS, REAR (2)

AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 1 thru 29.99 Pints

FUEL TANK Top Draw, Plastic, Rectangular, 17" Tank Depth, 40 US Gal (151L), Includes Auxiliary Draw Port and Fuel Filler Assembly, Mounted Between Frame Rails and Behind Rear Axle

DEF TANK 6.75 US Gal (26L) Capacity, Frame Mounted Outside Right Rail, Under Cab

CAB Conventional, Day Cab

Includes

: CAB DOOR LOCKS Power Door Locks All Doors

Description

: DOME LIGHT, CAB with OFF/DOOR/ON Settings; Located in Overhead Console
: READING LIGHT, CAB Located in Overhead Console
: STEP (2) One Per Door
: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door

MIRROR, INSIDE REAR VIEW Omit

GLASS, ALL WINDOWS Solar Absorbing, Tint

COLOR, INTERIOR Dark Ash

GAUGE CLUSTER English Speedometer, Includes English Odometer; Includes 3.5" Monochromatic Display with Personalization, Warning Messages and Vehicle Information

SEAT, DRIVER High Back with Integral Headrest, 10-Way Power Adjustable, Vinyl, Power Lumbar

SEAT, PASSENGER High Back with Integral Headrest, Vinyl, with Recline, without Center Section. Center Area of Floor Between Seats will be Untrimmed

MIRRORS (2) Manual Folding, Power Adjust, Heated, Black Heads and Arms, for 102" Load Width

SEAT BELT All Orange; 1 to 3

CAB INTERIOR TRIM Classic, for Day Cab

Includes

: SUN VISOR (2) Vinyl

WINDOW, POWER (2) in Left and Right Doors

HOSE CLAMPS, HEATER HOSE (Breeze) Belleville Washer Type

AIR BAG, FRONT, DRIVER SIDE

AIR BAG, FRONT, PASSENGER SIDE

AIR BAG, SIDE, DRIVER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE, PASSENGER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE CURTAIN Roof Mounted, for Front and Rear Outboard Seating Positions for Driver and Passenger Sides

AIR CONDITIONER with Heater, Single Zone

WHEELS, FRONT {Accuride 50180} DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

WHEELS, REAR {Accuride 50180} DUAL DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(2) TIRE, FRONT 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive

(4) TIRE, REAR 225/70R19.5 Load Range H HDR+ (CONTINENTAL), 643 rev/mile, 87 MPH, Drive

Services Section:

WARRANTY Standard for CV515, Effective with Vehicles Built December 3, 2018 or Later, CTS-3000A



April 14, 2023

To: Hunter International
Attn: Tom Grogan
End User: City of Vineland
Attn: Jeff Celebre

Ref: New Way Diamondback 8 Yard

Quote

Tom
Please quote City of Vineland, Attn Jeff Celebre on One CV Refuse Loader 84" CA, 19,500 GVWR or above on Sourcwell Contract with the following:

One New Way Diamond Back 8 Yard Rear Loader Refuse Body
Factory Installed
Pump / PTO
Work Lights
Strobe Lights
On Site Training
(1) Cart Tipper

\$ 88,400.00 Each

x Bob Hall

BOB HALL
VICE PRESIDENT

BH/rh